



STAND ALONE INSTALLATION TYPE

MODEL	Impeller No.	RATED POWER (HP)	FREQ.
6CNX411T2E	110-2H(S)	15	60
6CNX411T3E			

UNIT: inch

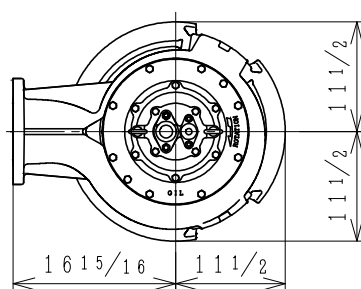

FLANGE (ANSI 150 PSI F.F)

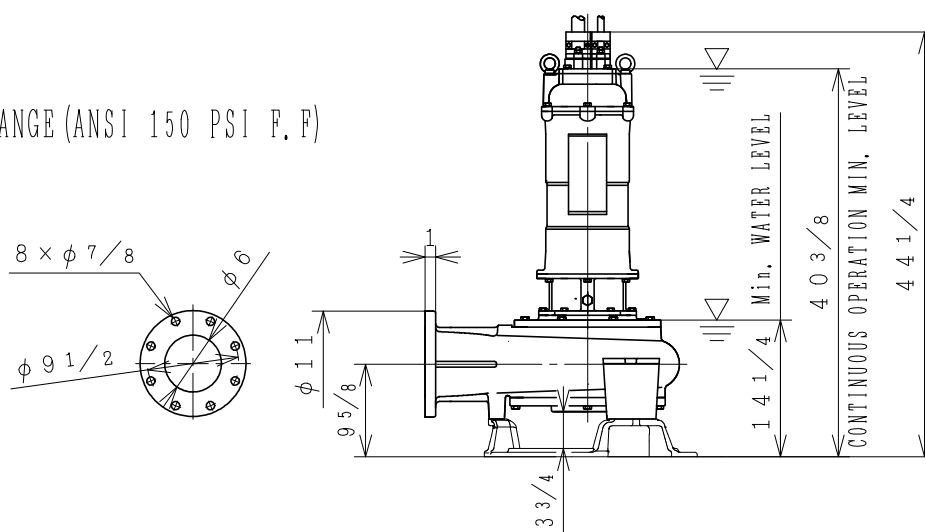

[Note]

In the event of continuous operation, the CONTINUOUS OPERATION MIN. LEVEL must be maintained.

Limit operation to 15 minutes (maximum) when operating the pump between the MIN. LEVEL and CONTINUOUS OPERATION MIN. LEVEL.

Cables are not shown on this drawing.



DWG.	N. Tanaka	May. 23, 2013
JUDG.	K. Takeuchi	May. 23, 2013
APPD.	M. Ikeda	May. 23, 2013

TITLE

PUMP DIMENSION

DWG No.

A 4 0 5 2 7 6