


GUIDE RAIL INSTALLATION TYPE

FLANGE (ANSI 150 PSI F.F)

e	f	t	n	h
$7\frac{1}{2}$	9	1	8	$\frac{3}{4}$

MODEL	Impeller No.	RATED POWER (HP)	FREQ.
4CNXH411T2E	110-2H (S)	15	60
4CNXH411T3E			

UNIT: inch

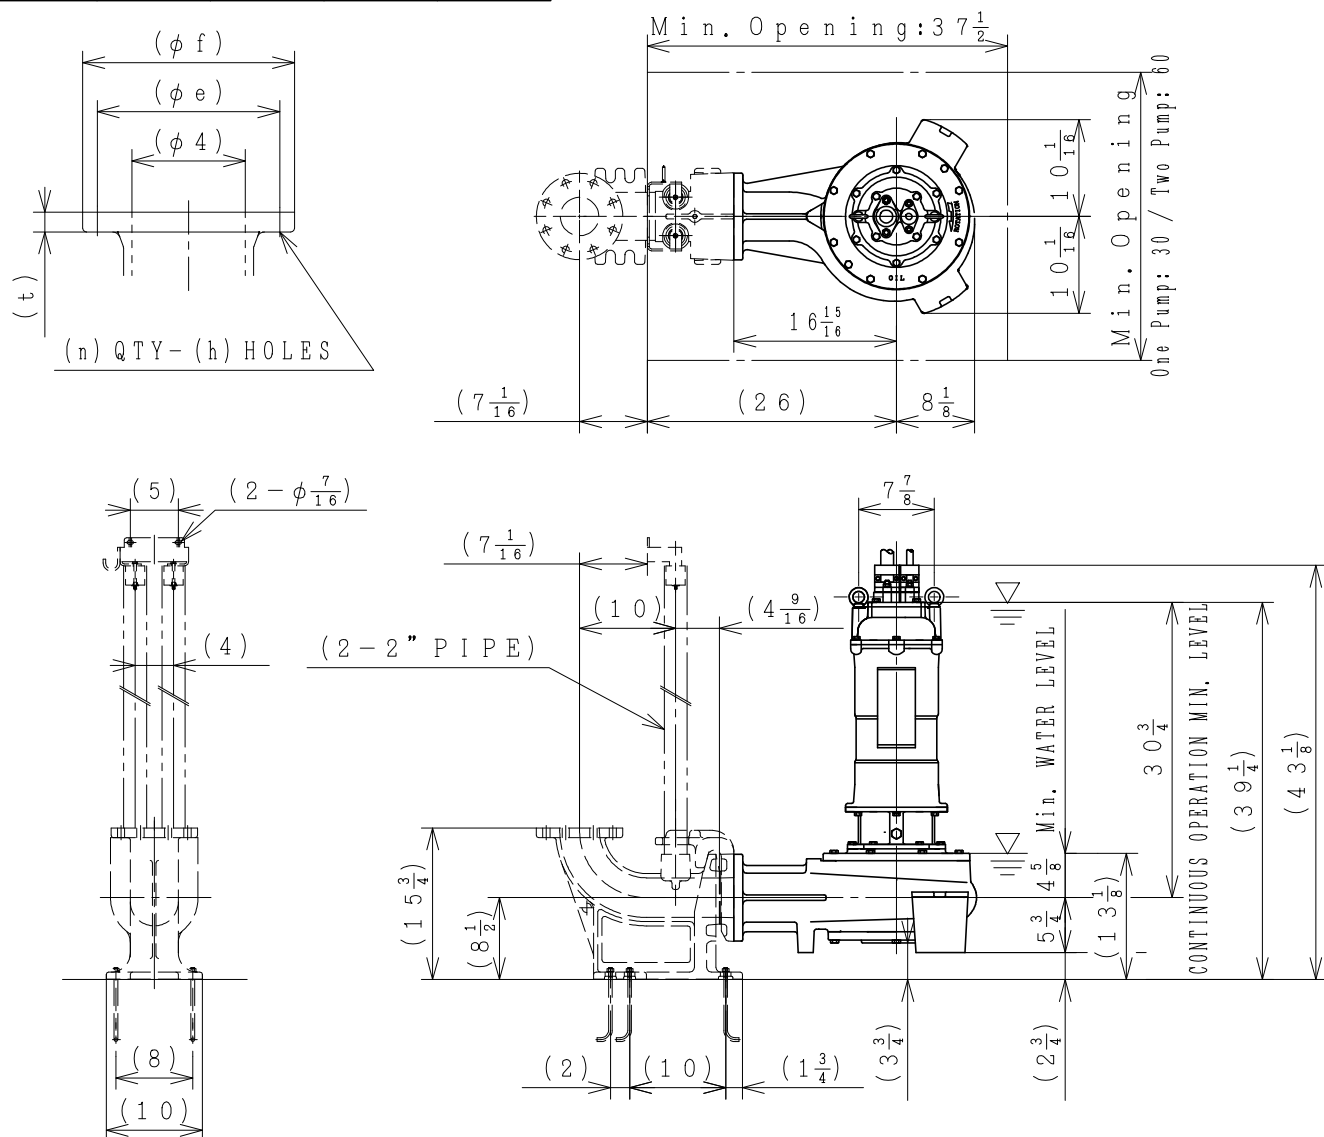

[Note]

In the event of continuous operation, the CONTINUOUS OPERATION MIN. LEVEL must be maintained.

Limit operation to 15 minutes (maximum) when operating the pump between the MIN. LEVEL and CONTINUOUS OPERATION MIN. LEVEL.

Cables are not shown on this drawing.

Recommend Guide Rail is CONERY MFG INC Type BERS-0400.



DWG.	M. Higuchi	Jul. 29, 2013
JUDG.	K. Takeuchi	Jul. 31, 2013
APPD.	M. Ikeda	Aug. 1, 2013

TITLE

PUMP DIMENSION

DWG No.

A405603