



STAND ALONE INSTALLATION TYPE

MODEL	Impeller No.	RATED POWER (HP)	FREQ.
4CNXH418T2E 4CNXH418T3E	185-2HD(S)	25	60
4CNXH422T2E 4CNXH422T3E	220-2HD(S)	30	60

UNIT: inch

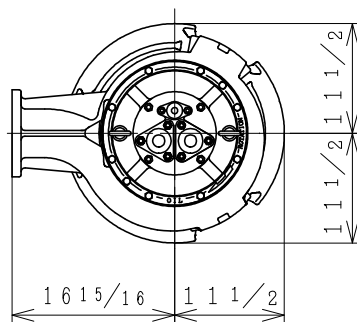

FLANGE (ANSI 150 PSI F.F)

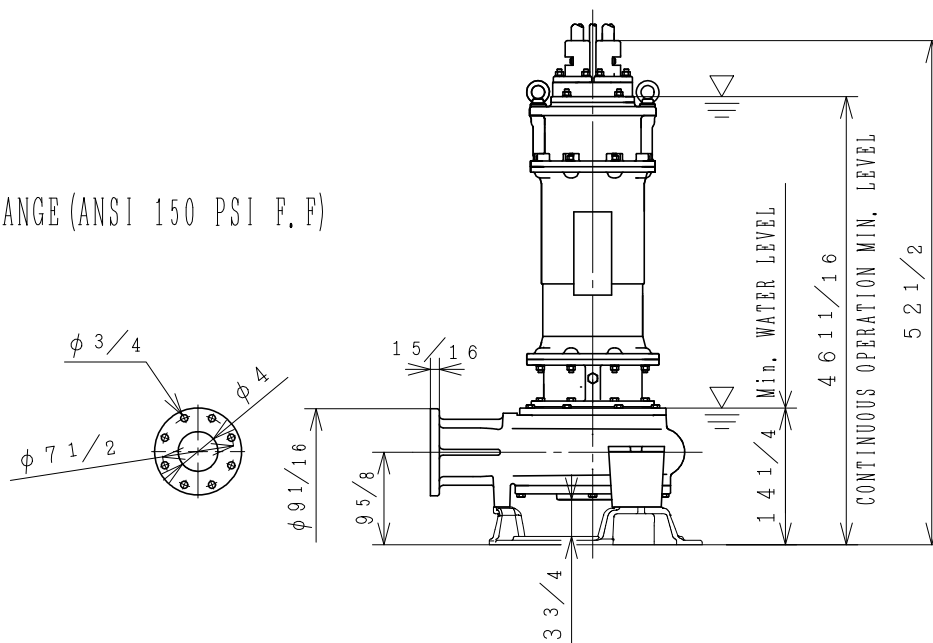

[Note]

In the event of continuous operation, the CONTINUOUS OPERATION MIN. LEVEL must be maintained.

Limit operation to 15 minutes (maximum) when operating the pump between the MIN. LEVEL and CONTINUOUS OPERATION MIN. LEVEL.

Cables are not shown on this drawing.



DWG.	M. Higuchi	Jul. 29, 2013
JUDG.	K. Takeuchi	Jul. 31, 2013
APPD.	M. Ikeda	Aug. 1, 2013

TITLE

PUMP DIMENSION

DWG No.

A405608