


GUIDE RAIL INSTALLATION TYPE

FLANGE (ANSI 150 PSI F.F)

e	f	t	n	h
$7 \frac{1}{2}$	9	1	8	$\frac{3}{4}$

MODEL	Impeller No.	RATED POWER (HP)	FREQ.
4CNXH437T3E	370-2MD(S)	50	60
	370-2HD(S)		

UNIT: inch

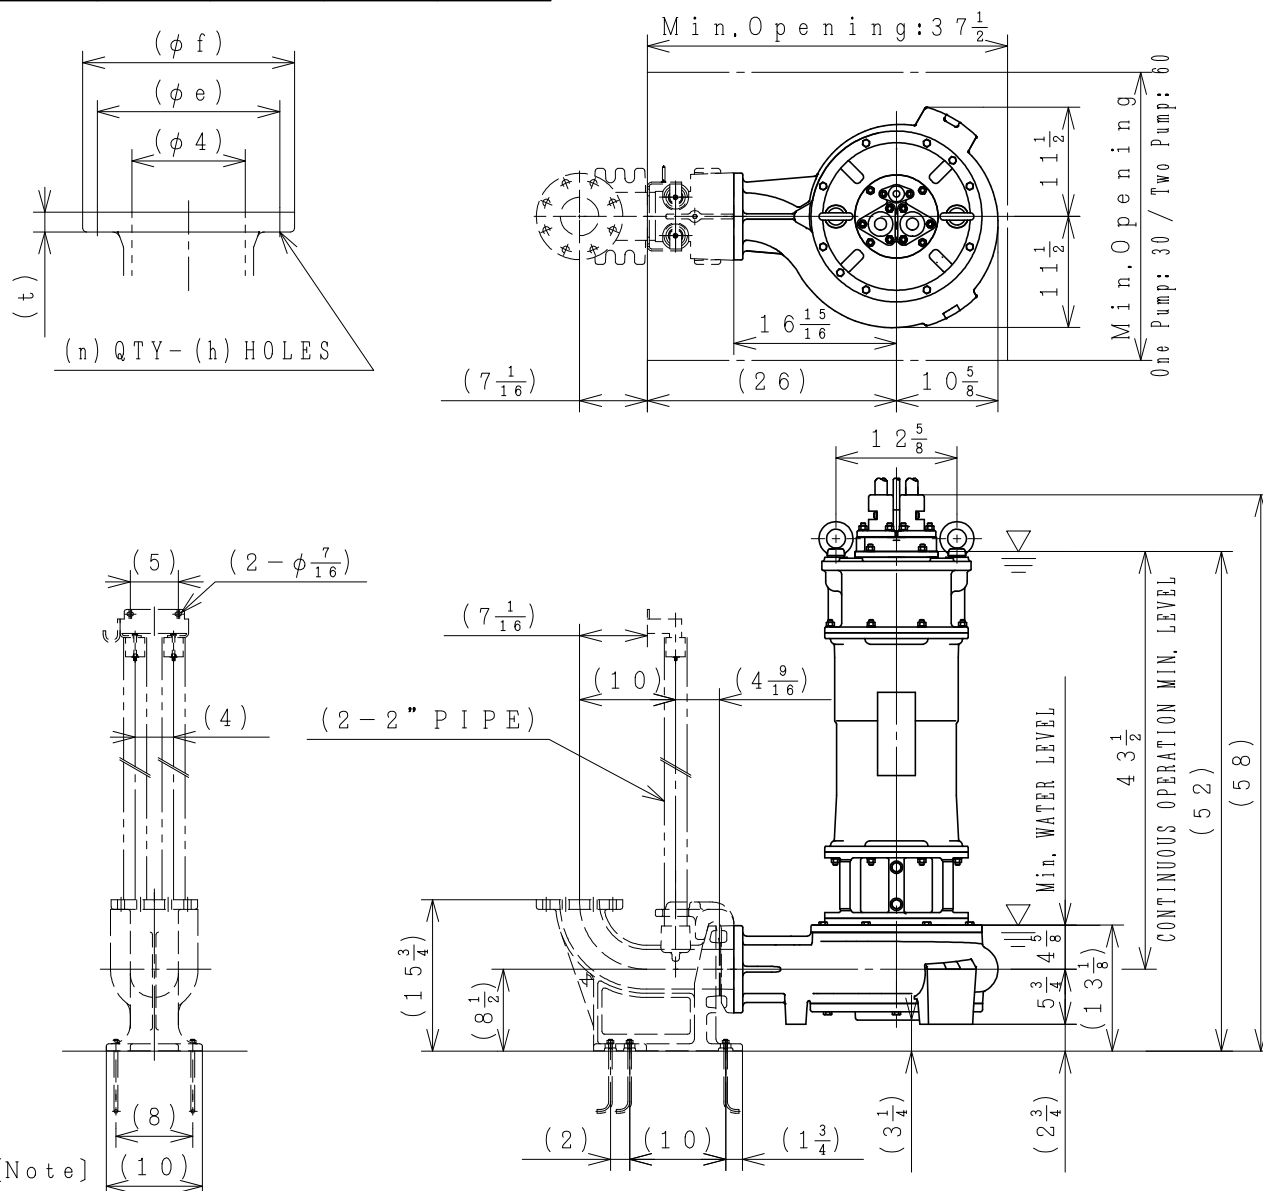

[Note]

In the event of continuous operation, the CONTINUOUS OPERATION MIN. LEVEL must be maintained.

Limit operation to 15 minutes (maximum) when operating the pump between the MIN. LEVEL and CONTINUOUS OPERATION MIN. LEVEL.

Cables are not shown on this drawing.

Recommend Guide Rail is CONERY MFG INC Type BERS-0400.



DWG.	M. Higuchi	Aug. 18, 2015
JUDG.	R. Itani	Aug. 19, 2015
APPD.	R. Itani	Aug. 19, 2015

TITLE

PUMP DIMENSION

DWG No.

A410750