




## STAND ALONE INSTALLATION TYPE

MODEL	Impeller No.	RATED POWER (HP)	FREQ.
4CNXH430T3E	300-2MD(S)	40	60
	300-2HD(S)		

UNIT: inch

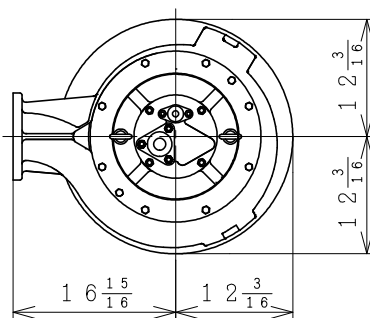

FLANGE (ANSI 150 PSI F.F)

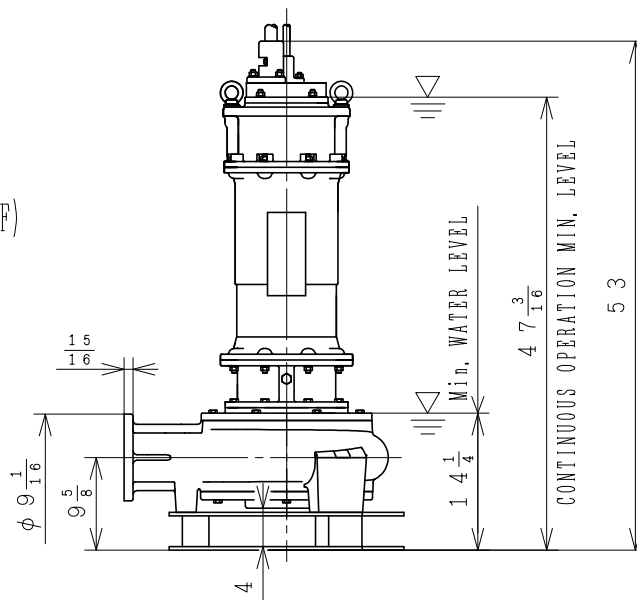

[Note]

In the event of continuous operation, the CONTINUOUS OPERATION MIN. LEVEL must be maintained.

Limit operation to 15 minutes (maximum) when operating the pump between the MIN. LEVEL and CONTINUOUS OPERATION MIN. LEVEL.

Cables are not shown on this drawing.



DWG.	M. Higuchi	Aug. 18, 2015
JUDG.	R. Itani	Aug. 19, 2015
APPD.	R. Itani	Aug. 19, 2015

TITLE

PUMP DIMENSION

DWG No.

A 4 1 0 7 5 1