


MODEL (Motor/Impeller) 4CNXH411T2E1 / 110-2H

DISCHARGE	S O L I D S I Z E	RATED POWER		VOLTAGE	P O L E	SYNCHRONOUS SPEED (R P M)	FREQ.	I N S. C L A S S
		H P	k W					
4" (100mm)	3" (76.2mm)	1 5	1 1	2 0 8	4	1 8 0 0	6 0	F

	FLOW (US gpm)	HEAD (ft)	EFF. (%)
B. E. P.	5 2 8 . 3	5 9 . 0	6 0 . 0

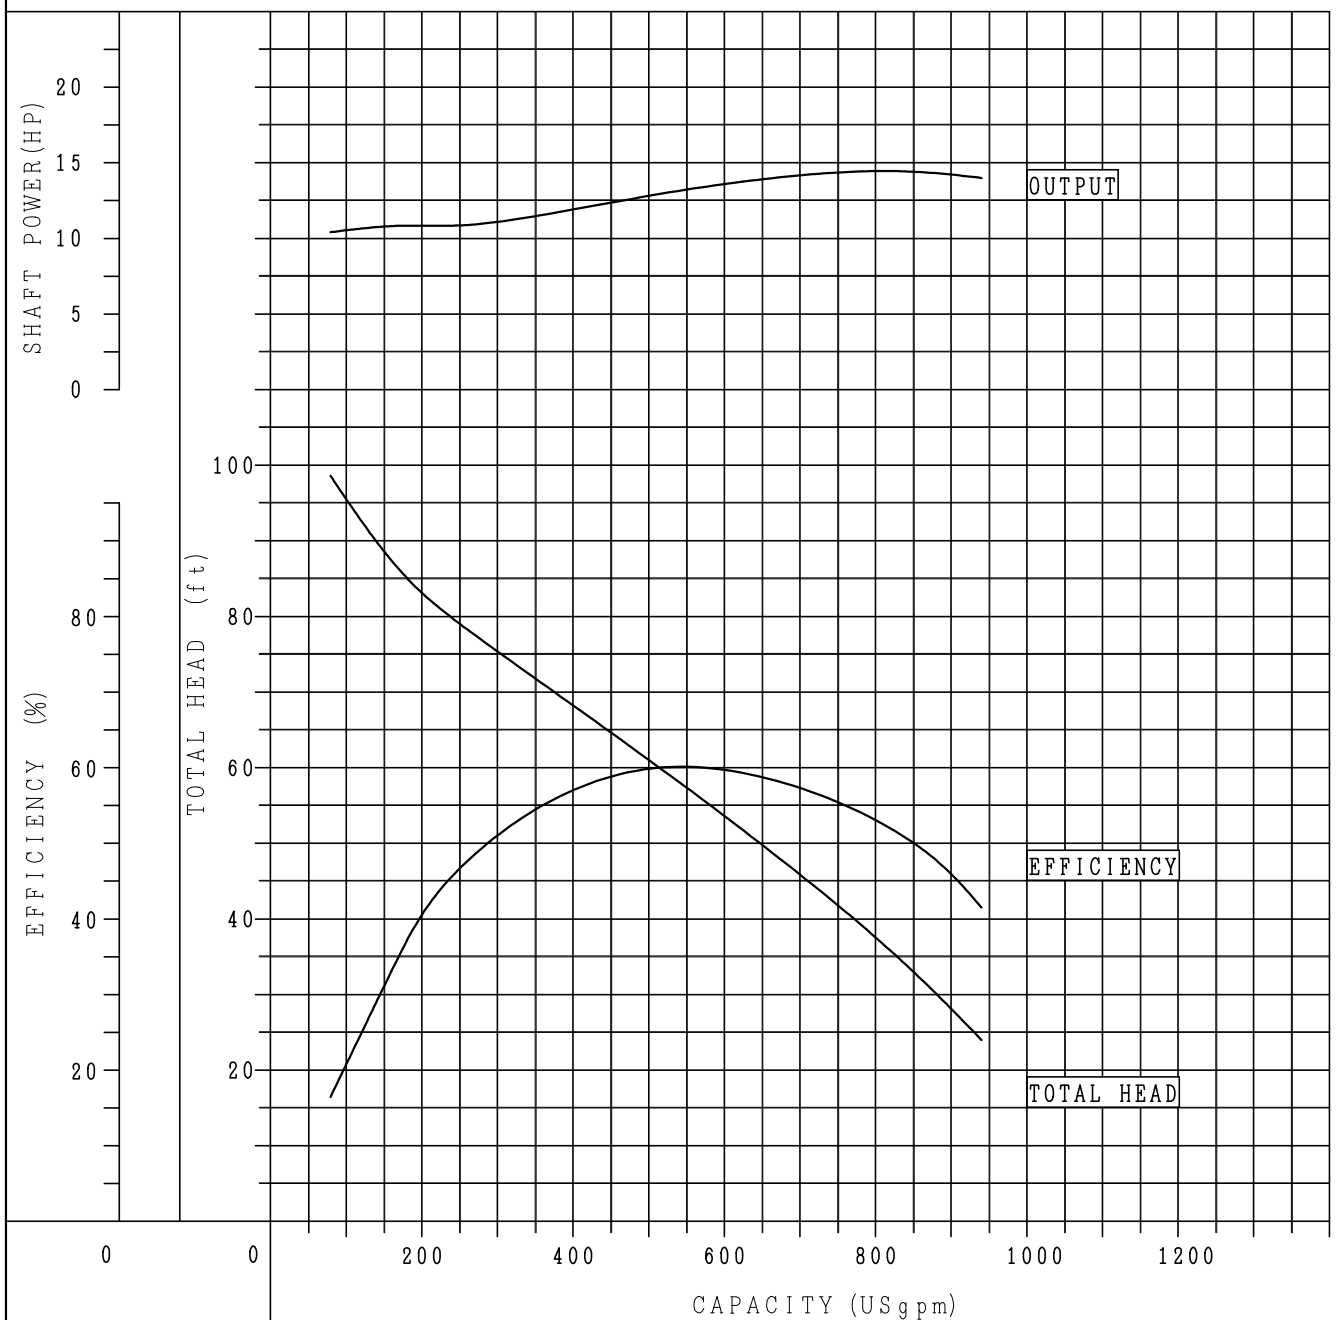

Performance with clear water and ambient temp Max. 40℃



DWG.	M. Higuchi	Mar. 8, 2018
JUDG.	M. Tarui	Mar. 8, 2018
APPD.	M. Tarui	Mar. 8, 2018

TITLE

PERFORMANCE CURVE

DWG No.

Y 4 0 5 6 2 8