


MODEL (Motor/Impeller) 4CNXH415T2E1 / 150-2H

DISCHARGE	S O L I D S I Z E	R A T E D P O W E R		V O L T A G E	P O L E	S Y N C H R O N O U S S P E E D (R P M)	F R E Q .	I N S . C L A S S
		H P	k W					
4" (100mm)	3" (76.2mm)	20	15	208	4	1800	60	F

	F L O W (U S g p m)	H E A D (f t)	E F F . (%)
B . E . P	528.3	78.7	63.0

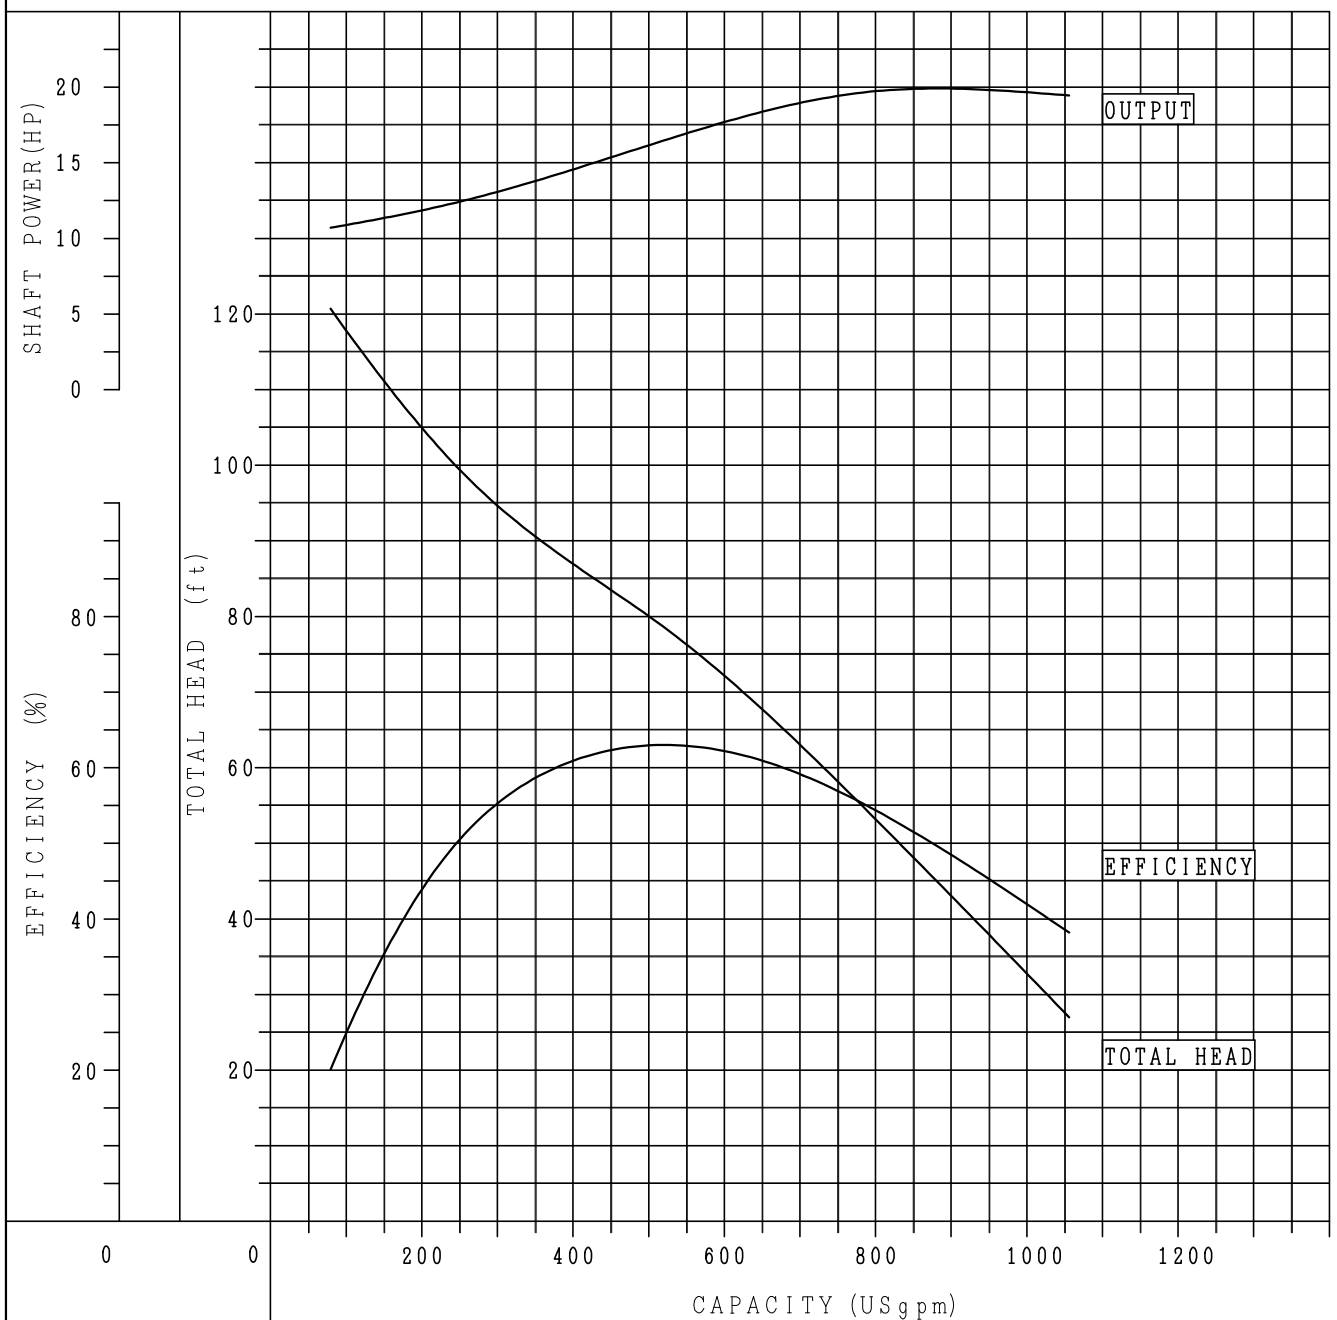

Performance with clear water and ambient temp Max. 40°C



DWG.	M. Higuchi	Mar. 8, 2018
JUDG.	M. Tarui	Mar. 8, 2018
APPD.	M. Tarui	Mar. 8, 2018

TITLE

PERFORMANCE CURVE

DWG No.

Y 4 0 5 6 3 0