


MODEL (Motor/Impeller) 4CNXH415T2/3E1 / 150-2H

DISCHARGE	S O L I D S I Z E	RATED POWER		VOLTAGE	P O L E	SYNCHRONOUS SPEED (R P M)	FREQ.	I N S. C L A S S
		H P	k W					
4" (100mm)	3" (76.2mm)	20	15	230/460	4	1800	60	F

	FLOW (US gpm)	HEAD (ft)	EFF. (%)
B. E. P.	528.3	82.0	65.0

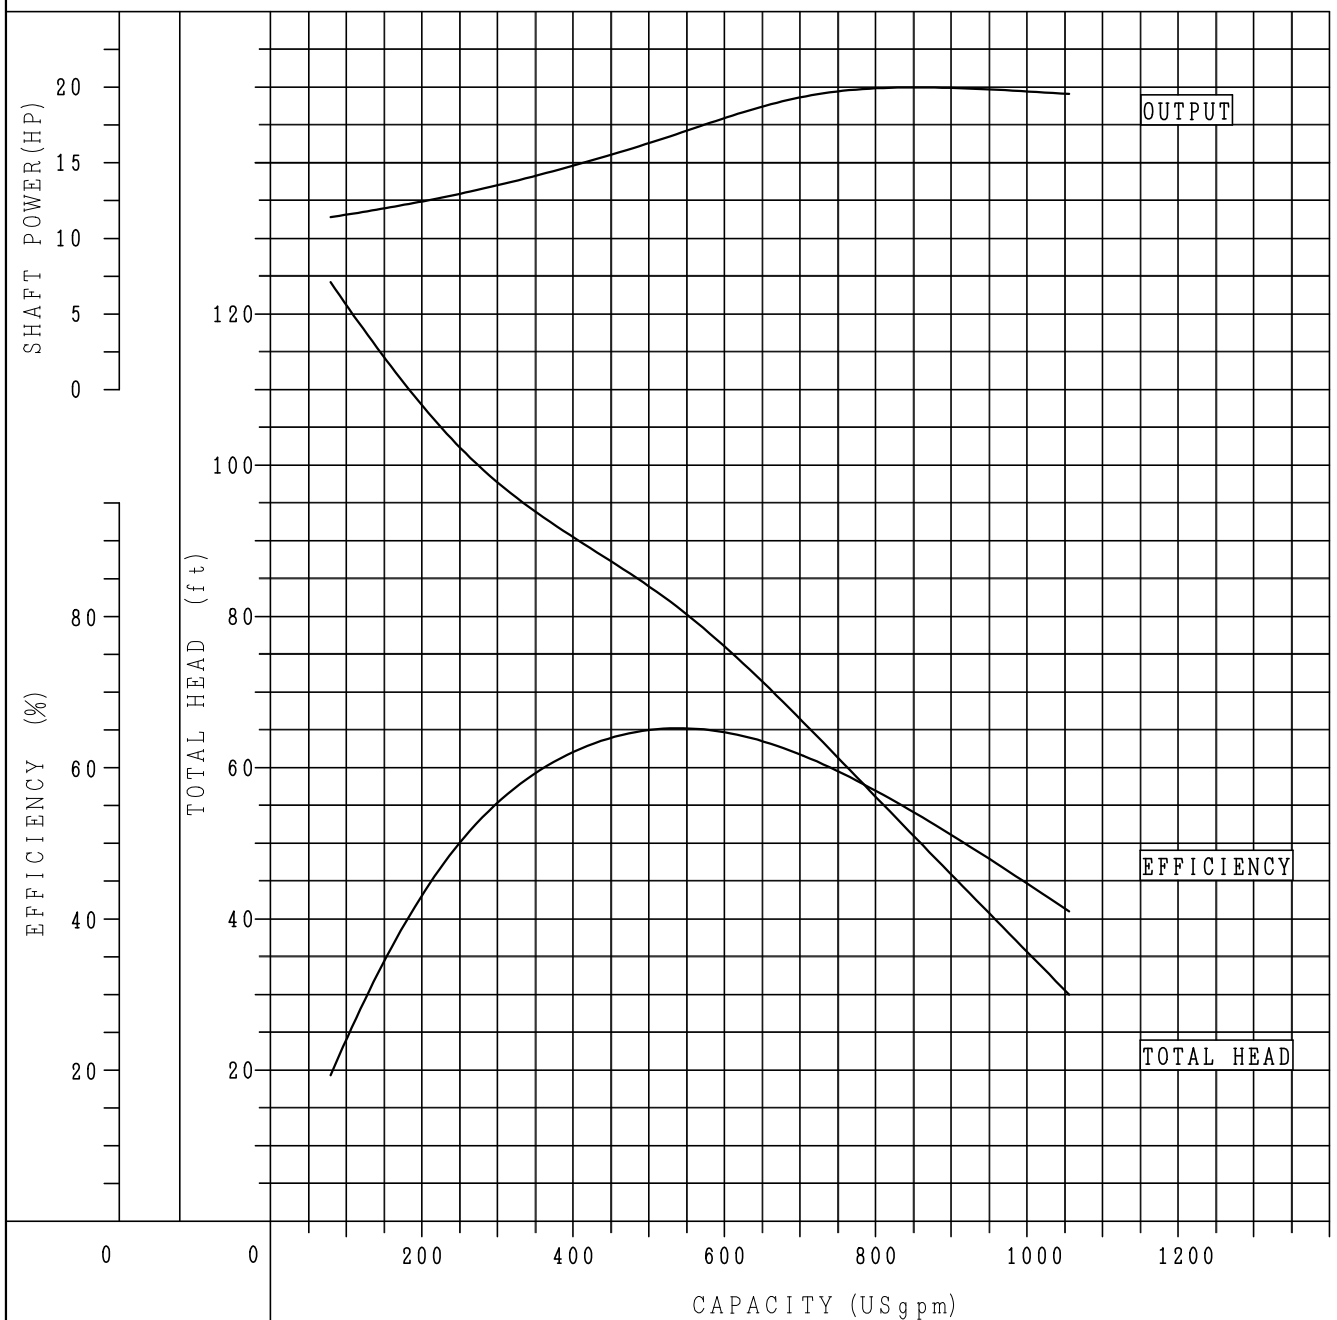

Performance with clear water and ambient temp Max. 40°C



DWG.	M. Higuchi	Mar. 8, 2018
JUDG.	M. Tarui	Mar. 8, 2018
APPD.	M. Tarui	Mar. 8, 2018

TITLE

PERFORMANCE CURVE

DWG No.

Y 4 0 5 6 3 1