


MODEL (Motor/Impeller) 4CNXH422T2E1 / 220-2HD

DISCHARGE	S O L I D S I Z E	RATED POWER		VOLTAGE	P O L E	SYNCHRONOUS SPEED (R P M)	FREQ.	I N S. C L A S S
		H P	k W					
4" (100mm)	3" (76.2mm)	3 0	2 2	2 0 8	4	1 8 0 0	6 0	F

	FLOW (US gpm)	HEAD (ft)	EFF. (%)
B. E. P.	7 9 2 . 5	8 5 . 2	6 4 . 5

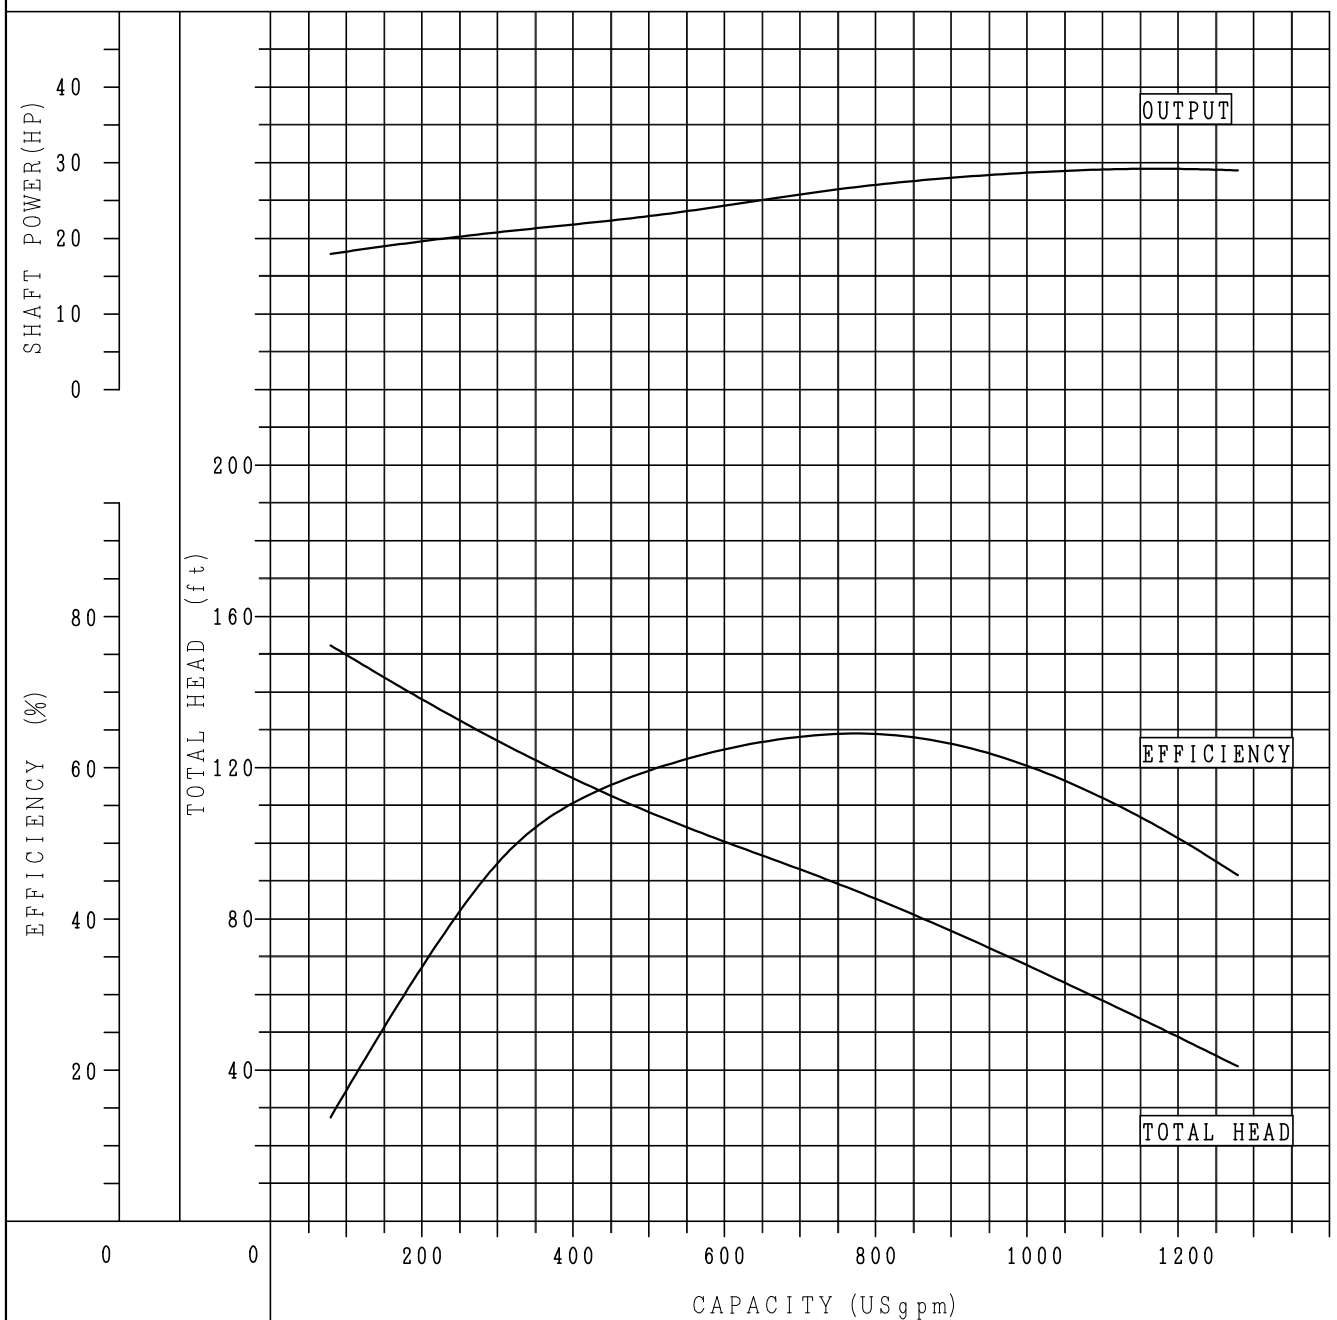

Performance with clear water and ambient temp Max. 40℃



DWG.	M. Higuchi	Mar. 8, 2018
JUDG.	M. Tarui	Mar. 8, 2018
APPD.	M. Tarui	Mar. 8, 2018

TITLE

PERFORMANCE CURVE

DWG No.

Y 4 0 5 6 3 4