

御注文主
CUSTOMER数 量
QUANTITY台
SET



据付寸法図

SME15JA・SME15JB・SME15JC

SME15JAW・SME15JBW・SME15JCW

SME22JA・SME22JB・SME22JC

SME22JAW・SME22JBW・SME22JCW

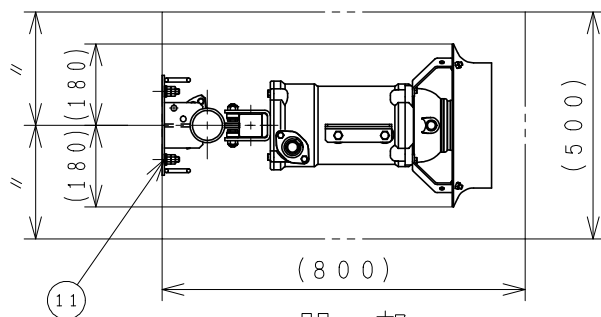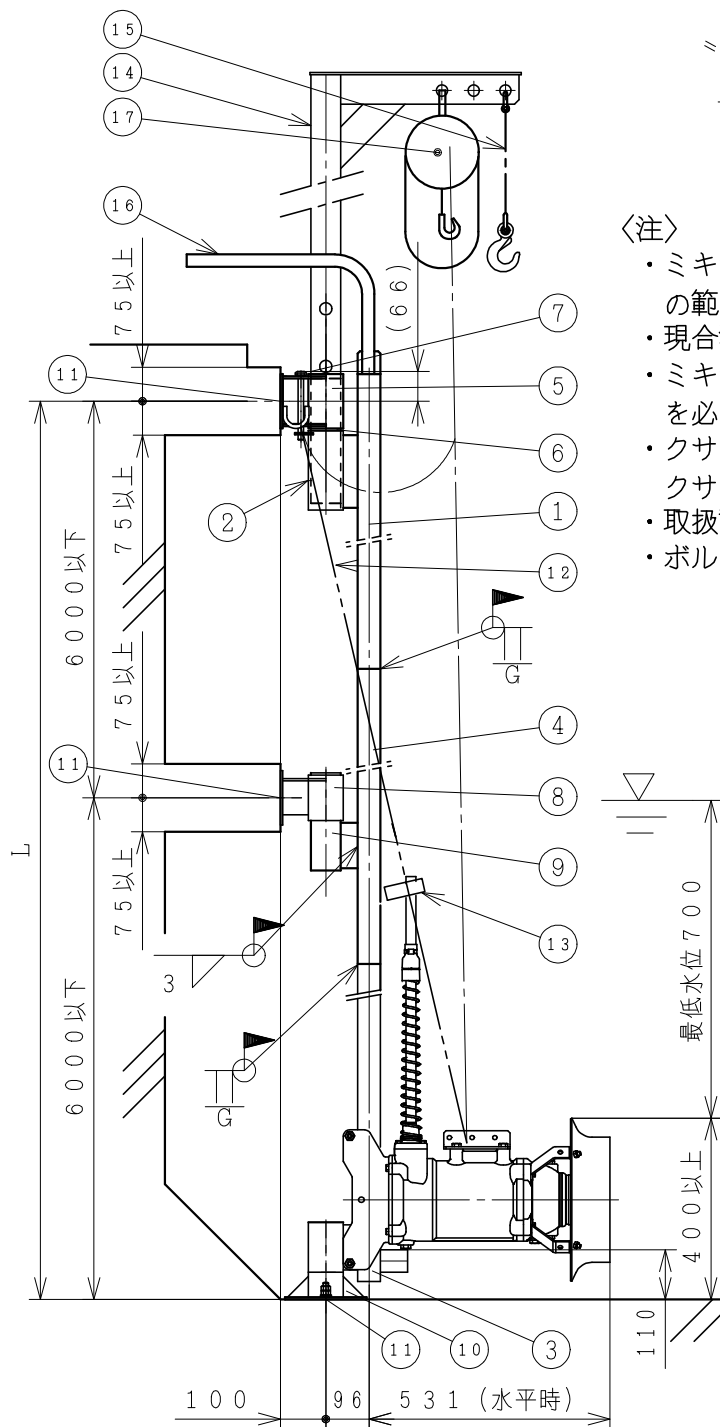

開口部

〈注〉

- ・ミキサは左右方向に片側 60° (20° ピッチ) の範囲で角度調整可能です。
- ・現合溶接箇所は工事施工者で溶接して下さい。
- ・ミキサへの空気の吸込を防止するため、最低水位を必ず確保してください。
- ・クサリを上部ブラケットに固定し、ミキサはクサリで吊り下げた状態で運転して下さい。
- ・取扱説明書に従って、施工及び据付を行って下さい。
- ・ボルトの取付ピッチは各部品図を参照してください。

部品 番号	部 品 名	ガイドバー合計長さ					
		4 _m	5 _m	6 _m	7 _m	8 _m	9 _m
	L 寸法 (最大)	3.9 _m	4.9 _m	5.9 _m	6.9 _m	7.9 _m	8.9 _m
	L 寸法 (最小)	3.2 _m	3.5 _m	3.5 _m	3.8 _m	3.8 _m	3.8 _m
1	ガイドバーウエ	3 _m	3 _m	3 _m	3 _m	3 _m	3 _m
2	止めねじ	1	1	1	1	1	1
3	ガイドバーシタ	1 _m	2 _m	3 _m	3 _m	3 _m	3 _m
4	ガイドバーツギ	—	—	—	1 _m	2 _m	3 _m
5	上部ブラケット	1	1	1	1	1	1
6	ジョイントパイプ	1	1	1	1	1	1
7	ロックピン	1	1	1	1	1	1
8	中間ブラケット	—	—	—	1	1	1
9	ヒンジ	—	—	—	1	1	1
10	ベース	1	1	1	1	1	1
11	アンカーボルト	4	4	4	6	6	6
12	クサリ	6 _m	6 _m	6 _m	7 _m	8 _m	9 _m
13	ケーブルクランプ	オプション		1	1	1	1
14	吊上支柱	オプション					
15	ツリフック	オプション					
16	ハンドル	オプション					
17	チェーンブロック	オプション					

	製 図	勝 見	'18・07・31
	検 査	井 谷	'18・07・31
	承認	渡 部	'18・07・31

名 称
TITLE水中ミキサ
据付寸法図図 番
DWG No.

A 4 1 4 1 5 9

△2

1805001
0102

御注文主
CUSTOMER数 量
QUANTITY台
SET



Installation Drawing

SME15JA・SME15JB・SME15JC

SME15JAW・SME15JBW・SME15JCW

SME22JA・SME22JB・SME22JC

SME22JAW・SME22JBW・SME22JCW

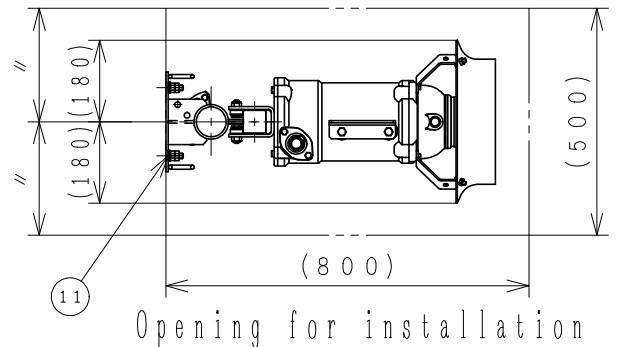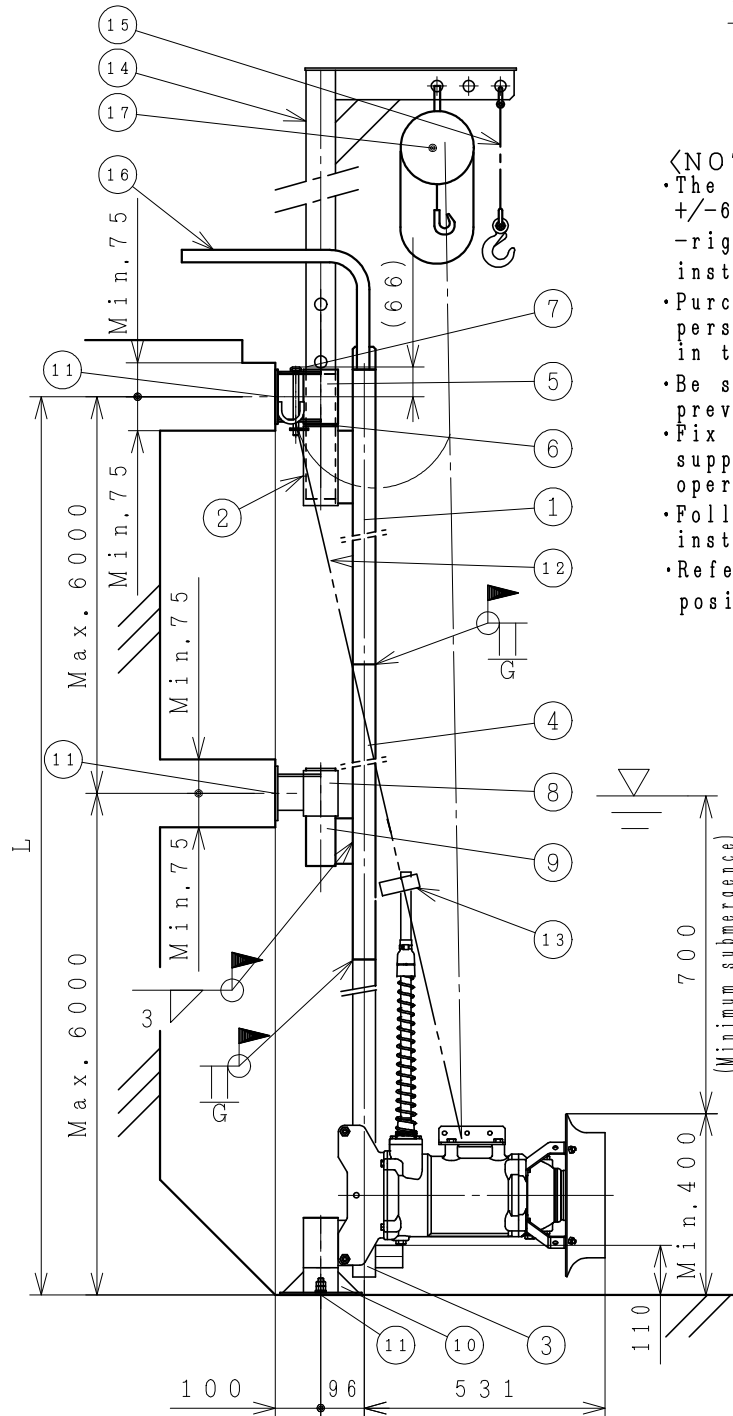

Opening for installation

<NOTE>

- The mixer can be adjusted in the range of ± 60 degrees (20 degrees pitch) in the left-right direction around the center of the installation equipment base.
- Purchaser must arrange welding qualified personnel and perform on-site welding shown in this drawing securely.
- Be sure to ensure minimum submergence to prevent air from being drawn into the mixer.
- Fix the chain to the upper bracket to support the load of the mixer during operation sufficiently.
- Follow the instruction manual for installing the mixer.
- Refer to each part drawing for mounting position and pitch of the anchor bolt.

No.	p a r t s	Total Length (Guide Bar)					
		4 m	5 m	6 m	7 m	8 m	9 m
	L Dimension (Max.)	3.9m	4.9m	5.9m	6.9m	7.9m	8.9m
	L Dimension (Min.)	3.2m	3.5m	3.5m	3.8m	3.8m	3.8m
1	Guide Bar Upper	3 m	3 m	3 m	3 m	3 m	3 m
2	Set Screw	1	1	1	1	1	1
3	Guide Bar Lower	1 m	2 m	3 m	3 m	3 m	3 m
4	Guide Bar Extension	—	—	—	1 m	2 m	3 m
5	Upper Bracket	1	1	1	1	1	1
6	Joint Pipe	1	1	1	1	1	1
7	Locking Pin	1	1	1	1	1	1
8	Extension Bracket	—	—	—	1	1	1
9	Hinge	—	—	—	1	1	1
10	Base	1	1	1	1	1	1
11	Anchor Bolt	4	4	4	6	6	6
12	Chain	6 m	6 m	6 m	7 m	8 m	9 m
13	Cable Clamp	Option					
14	Hanger Pipe	Option					
15	Hook	Option					
16	Handle	Option					
17	Chain Hoist	Option					



製図 DWG. K. Katsumi '18.07.31
 検図 JUDG. R. Itani '18.07.31
 承認 APPD. K. Watanabe '18.07.31

名称
TITLE

Submersible Mixer
 Installation Drawing

図番
DWG No.

A 4 1 4 1 5 9

1805001
0202